J. J. Keller® & Associates, Inc.®
Since 1953

J. J. Keller®
DASH CAM PRO
QUICK START GUIDE

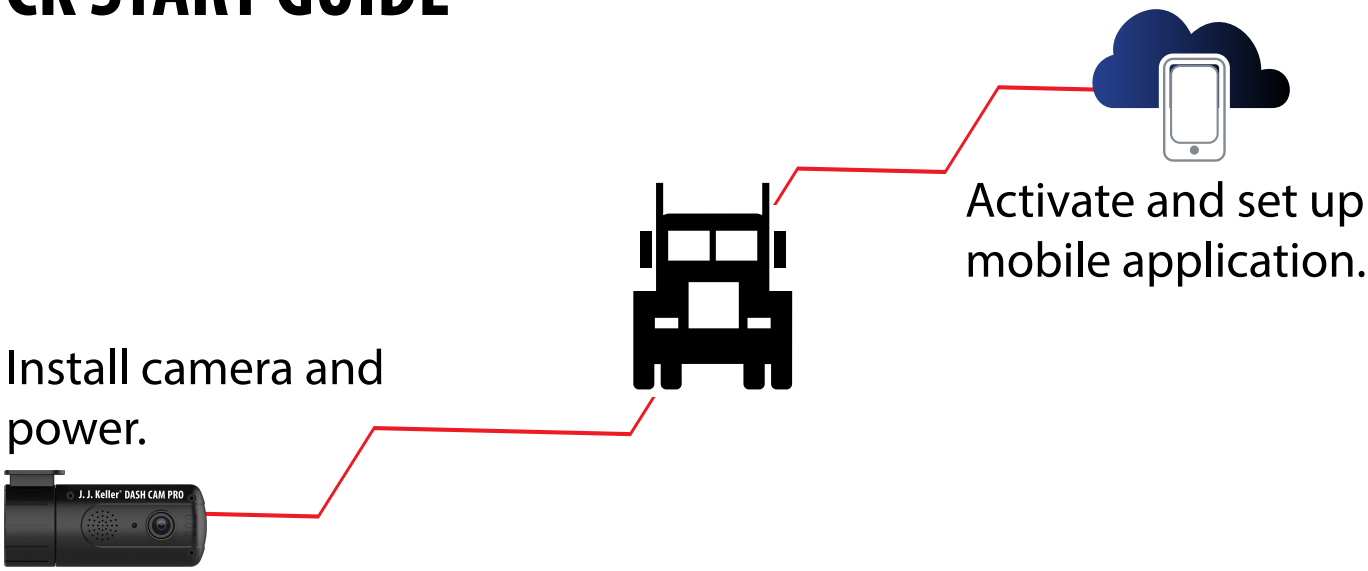

MOUNT CAMERA TO WINDSHIELD



Locate area on windshield. Clean the area prior to mounting. Remove adhesive sticker cover, and mount to windshield.

Mount 4-8" below headliner centered in windshield
Ensure there are no obstructions.
Adjust camera lens to face toward the road.

CONNECT POWER TO CAMERA

Inline Cable Installation:
Connect ground (black) and ignition wires for power. Use of a certified mobile electronics technician is recommended for hardwire installation.

Many states have laws that either restrict or prohibit mounting objects on windshields. Specific laws vary from state to state. Before mounting the Dash Cam Pro, check the state and local laws and ordinances where you drive. It is the user's responsibility to mount the Dash Cam Pro in compliance with all applicable laws and ordinances. J. J. Keller does not accept responsibility for any fines, penalties, or damages that may be incurred as a result of any state or local law or ordinance relating to your use of the Dash Cam Pro.